



5 CCT SELECTABLE

**SINGLE OR
DOUBLE-ENDED WIRING**

FROSTED GLASS LENS

**120V-277V MODELS
AVAILABLE IN 2', 3',
AND 4' LENGTHS**

**347V MODEL AVAILABLE
IN 4' FOR HIGH
VOLTAGE APPLICATIONS**

SUGGESTED APPLICATIONS

Offices, Retail, Warehouses,
Industrial Applications

LED T5 LAMPS


CCT SELECTABLE



ColorQuick®

Selectable Color Technology

Switch to/from the following CCT



SATCO|NUVO's LED T5 Lamps make for easy replacement of fluorescent tubes. Offered in 2', 3', and 4' lengths, these 120-277V range selectable lamps are also five CCT selectable for ultimate versatility. For high voltage applications, a 4' model is also offered in 347V. Select models are DLC listed.



GENERAL SPECIFICATIONS

Frequency: 50/60Hz
Power Factor: >0.9
THD%: <25%
Ballast: Type B
Lamp Efficacy: up to 144 LPW
CRI: 82
CCT: 3000K/3500K/4000K/5000K/6500K

Beam Angle: 160°
Functional Life: 50,000 Hours
Location Rating: Damp
Ambient Operating Temperature: -20°C (-4°F) to +45°C (+113°F)
Rated for Enclosed Fixtures: Yes
Construction: Pet Coated Shatterproof Glass
Base : G5, Miniature Bi-Pin

ITEM SPECIFICATIONS / ORDER INFO



Item	Length	Wattage	Fluorescent Replacement Wattage	Max Lumens	Range Voltage	Input Current @ Voltage	Wiring	DLC ID
S11650	2'	9W	14W	1,250	120V-277V	0.08-0.03A	Single Ended, Double Ended	—
S11651	3'	12W	21W	1,650	120V-277V	1.00-0.04A	Single Ended, Double Ended	—
S11652	4'	13W	28W	1,850	120V-277V	0.11-0.05A	Single Ended, Double Ended	S-5P80ZG
S11653	2'	12W	24W	1,650	120V-277V	1.00-0.04A	Single Ended, Double Ended	—
S11654	3'	16W	39W	2,150	120V-277V	0.13-0.06A	Single Ended, Double Ended	—
S11655	4'	25W	54W	3,600	120V-277V	0.21-0.10A	Single Ended, Double Ended	S-5B02FZ
S11656	4'	25W	54W	3,600	120V-347V	0.21-0.07A	Double Ended	S-95JG10

DIMENSIONS/WEIGHTS

Length	Diameter	Weight
2'	0.88"	0.20Lbs.
3'	0.88"	0.28Lbs.
4'	0.88"	0.37Lbs.

WIRING DIAGRAMS


• Single-ended:



• Double-ended:



PHOTOMETRICS

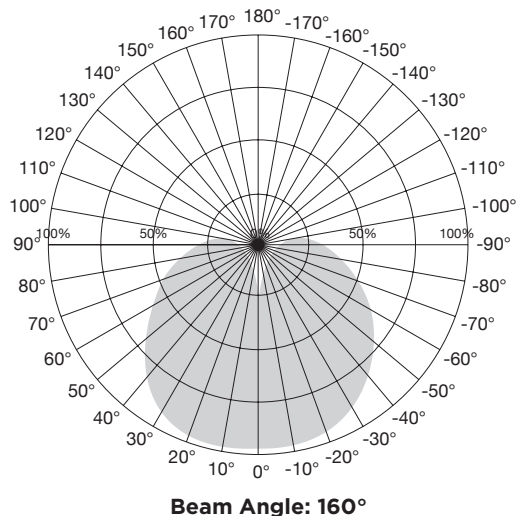

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. Fixture may not be compatible with all dimmers.

DLC Primary Use: Internal Driver/Line Voltage (UL Type B Lamps)

Replacement wattage shown depends on application and fixture. Specifications are subject to change without prior notice.