

LED Lamps with Smooth Warm Dimming

Introducing TCP Allusion "incandescent-like" LED smooth warm dimming technology. LEDs with unique dimming profile that replicates true incandescent/halogen dimming.

Limitless options for the following applications:

- Table Lamps
- Decorative Lighting
- Floor Lamps Chandeliers
- Sconces
- **Ceiling Fixtures**
- - - **Downlight applications**

Dimmable 6" & 5"

Recessed Downlights Track Lights

Great features and benefits:

- Energy efficient: Up to 85% more efficient than incandescent/halogen replacements
- Long life: 25,000 hours
- Dimming Range (CCT):

PAR30 - 3000K to 2000K A19 - 2700K to 2000K B11 - 2400K to 1900K PAR38 - 3000K to 2000K

BR30 - 2900K to 2000K 5"/6" Downlight — 2900K to 2000K

Similar look and feel as incandescent alternative

Approved for damp locations











with Smooth Warm Dimming

LED

25,000 Hours average rated life, 120 Volts

Applications:

Perfect for hospitality applications that rely on mood setting.

- + Table Lamps
- + Decorative Lighting


+ Dimmable 6" & 5"

Downlight applications

- + Floor Lamps
- + Chandeliers
- **+** Sconces
- + Recessed Downlights
- + Ceiling Fixtures
- + Track Lights

	Features	Benefits				
	Up to 85% less energy than incandescent/halogen replacements	Instant energy savings				
	Smooth warm dimming	Creates the perfect atmosphere				
	Long life	Minimizes replacement and maintenance costs				
	Shatter resistant	Lower the risk of injury and breakage				
	UL approved for damp locations	Can be used outdoors in enclosed fixtures				



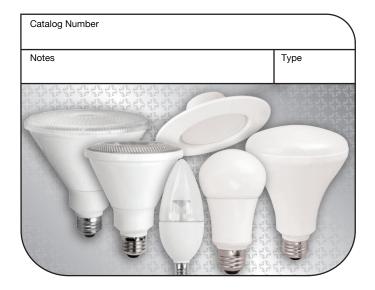

Specifications	
Input Line Voltage:	120 VAC
Input Power	See Chart
Input Line Frequency	50/60HZ
Lamp Life (Rated)	25,000 hrs
Minimum Starting Temp	30℃
Maximum Operating Temp	40°C
CRI	82



Warranties and Certifications:	Item#	Description	Voltage	Wattage	Incandescent/Halogen Wattage Comparison	Lumens	LPW	ССТ	CRI	R9	M.O.L. (inches)	Diameter (inches)
F VEAD	TCP Allusion LED L	amps — with SMOOTH WARM DIMMING										
$\frac{\text{YEAR}}{\text{WARRANTY}}$	LED9A19DA	9W A19 A-Lamp	120	9	60	650	72.2	2700K to 2000K	82	>0	4.6	2.4
_	LED5E12B11DA	5W B11 Candelabra Blunt Tip	120	5	25	300	60	2400K to 1900K	82	>0	3.8	1.4
د (ال	LED10BR30DA	10W BR30	120	10	65	675	67.5	2900K to 2000K	82	>0	5.4	3.8
LISTED	LED15P30DA	15W PAR30	120	15	100	950	63.3	3000K to 2000K	82	>0	4.6	3.8
	LED15P38DA	15W PAR38	120	15	100	975	65	3000K to 2000K	82	>0	5.2	4.8
	LED10DR56DA	10W 5"/6" Recessed Downlight	120	10	65	700	70	2900K to 2000K	82	>0	2.3	7.5
*Based on 12 hours use per day For the most up-to-date specs, please visit www.tcpi.com												

