

JUSTRITE® Sure-Grip® EX Safety Cabinets



18-gauge (1-mm) double wall steel with 1½" (38-mm) of insulating air space. Welded construction holds squareness for long life; door astragal provides extra sturdiness.




Formed internal offset adds rigidity and strength.



Enclosed self-close mechanism provides obstruction-free access to top shelf space. Self-indexing doors close in sequence to ensure a tight closure from top to bottom. *Patent Pending*


894520, 45 gal., self-close

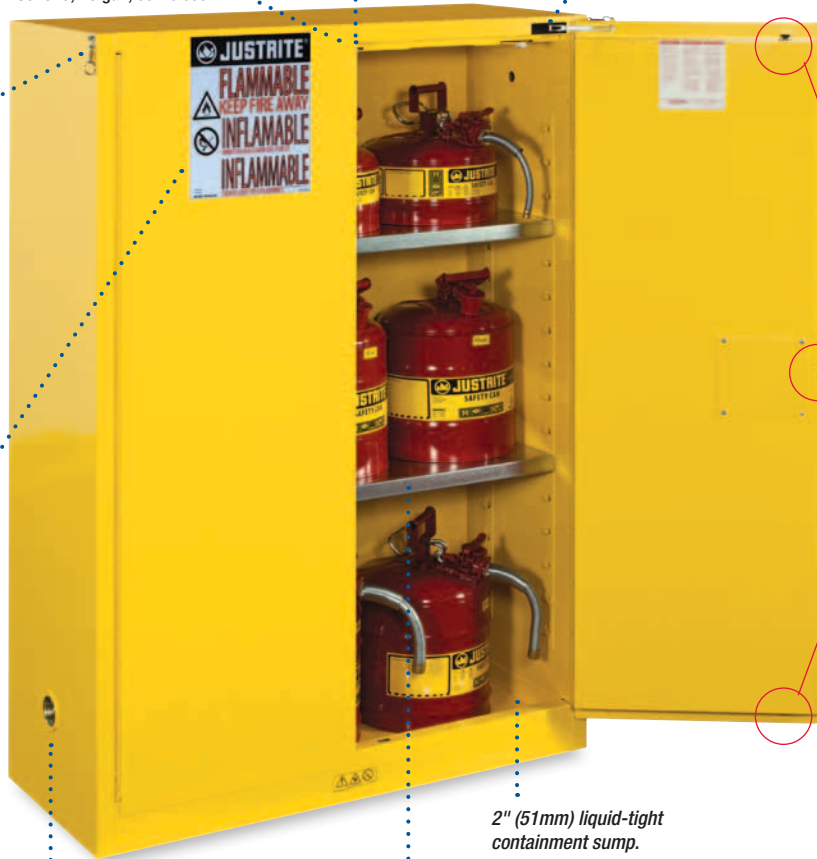

Rounded safety corners on doors reduce accidental nicks or cuts and potential hand injury.



Fusible links hold doors wide open and melts at 165°F (74°C) for automatic closure (on self-close models).




Three-point, stainless steel bullet self-latching system provides failsafe, positive door closure with increased heat resistance. *Patent Pending*



Haz-Alert™ reflective labels provide high visibility in the dark under fire conditions or power outage when illuminated by a flashlight beam. Warning in three languages. Large international warning icons enhance global communications. *Patent Pending*

Dual vents with built-in flame arresters at bottom and opposite top.

2" (51mm) liquid-tight containment sump.



Patented SpillSlope™ safety shelves direct spills to back and bottom of leak proof sump; adjust on 3" (76-mm) centers for versatile storage. Shelves meet ANSI MH28.1



U•Loc™ handle accommodates optional padlock for extra security and keycoding multiples for convenient access. Double key set included for keyed lock. *Patent Pending*



Complies with OSHA 29 CFR 1910.106 and NFPA Code 30, section 9.5

Most are FM approved