

brandstand™

cübie

User Manual

Introduction

Thank you for purchasing the Brandstand Cubie™. This product allows the hotel to offer more outlets and USB charging to their guests at the desk level. Please be sure to read this User Manual carefully to ensure proper installation.

The information in this document is subject to change and does not represent a commitment on the part of Brandstand Products. No part of this document may be reproduced, transmitted in any form or by any means, electronic or mechanical, including photocopying, recording, or information storage and retrieval systems, or translated into any language for any purpose other than the purchaser's personal use, without the written permission of Brandstand.


Product Features

- Convenient connections for AC and USB-powered devices
- Efficient and stylish design with multiple mounting options
- Complete surge protection through all AC outlets and/or USB Ports
- Overheating/Overcurrent Protection


Product Description

- 3 AC outlets
- 4 Powered USB ports
- Surge Protector
- Circuit Breaker
- 6ft 14AWG Power Cord with Pass Through Plug
- Rubber Foot
- 2 Allen Bolts
- 2 Wood Screws
- 2 Spacers
- 2 Machine Screws
- Optional L – Shape Mounting Bracket
- Silver and Black Protective Faceplates

Cubie™ - Front View

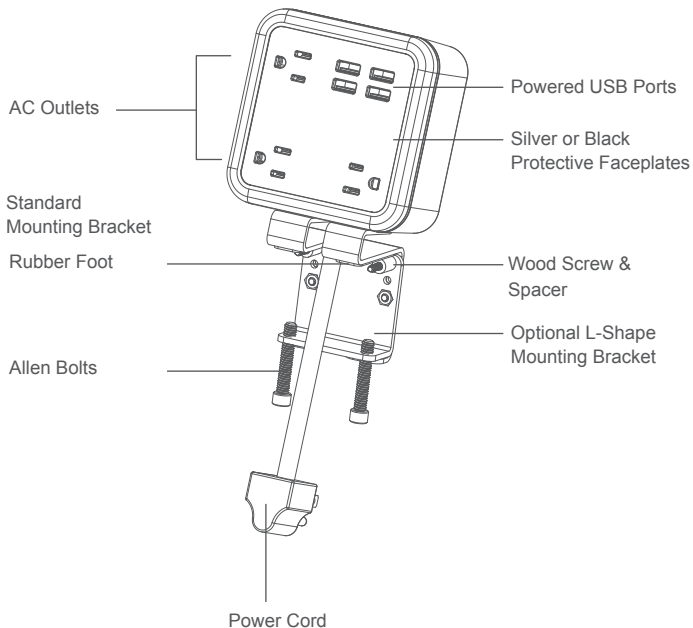

Cubie™ - Back View

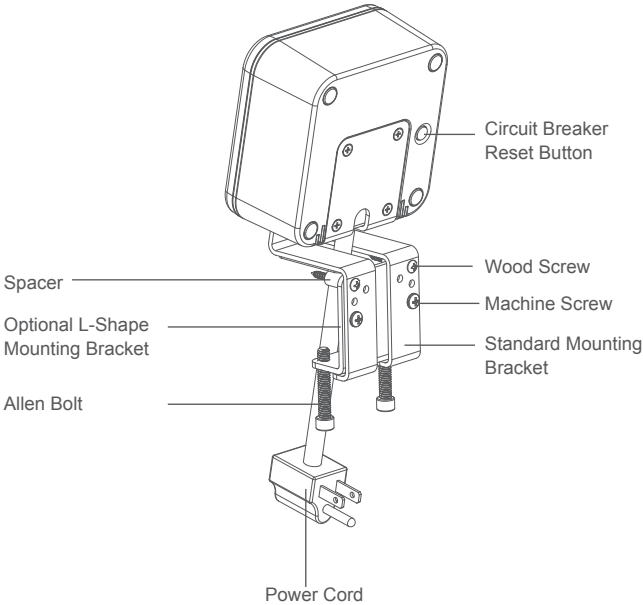


Quick Installation Guide

Installation Option #1:

For desks with a lip less than 2 inches

1. Attach L-Shape mounting bracket to the standard mounting bracket with machine screws (included).

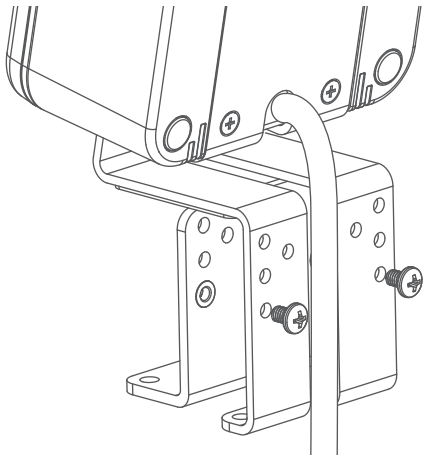


Quick Installation Guide

Installation Option #1:

For desks with a lip less than 2 inches

2. Position Cubie™ on the back of the desk. Tighten allen bolts to secure bracket.

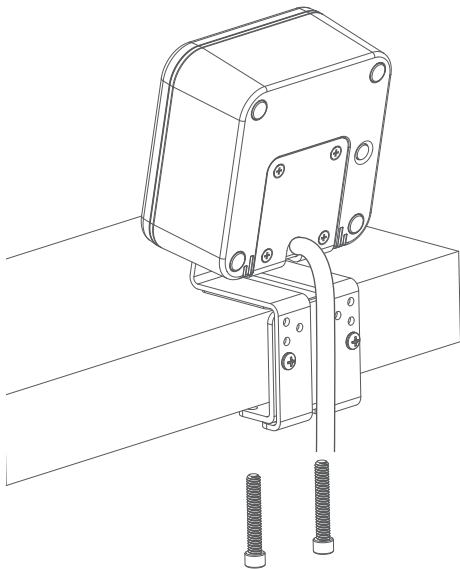


Quick Installation Guide

Installation Option #1:

For desks with a lip less than 2 inches

3. Drill pilot holes at the desired screw location. A 1/16" or 3/32" drill bit should be used to reduce the risk of splitting the wood. Install wood screws (included) through bracket and into the pilot holes.

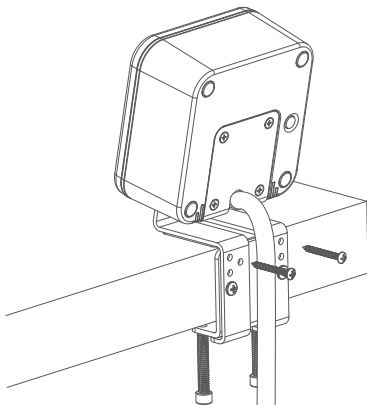


4. Plug directly into wall AC outlet. Do not plug into another surge protector or extension cord.

Quick Installation Guide

Installation Option #2:

For desks with a lip more than 2 inches or flat back

1. Position Cubie™ on the back of the desk. Drill pilot holes at the desired screw location. A 1/16" or 3/32" drill bit should be used to reduce the risk of splitting the wood. (L-Shaped Mounting Bracket not needed)

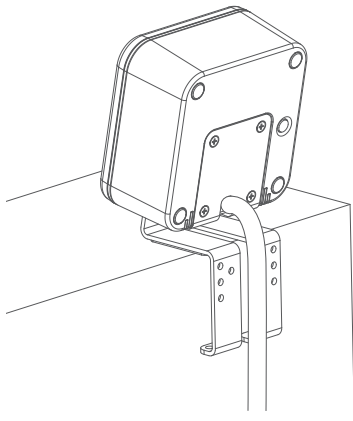


Quick Installation Guide

Installation Option #2:

For desks with a lip more than 2 inches or flat back

2. Position spacers and install Wood Screws (included) through bracket and into the pilot holes.

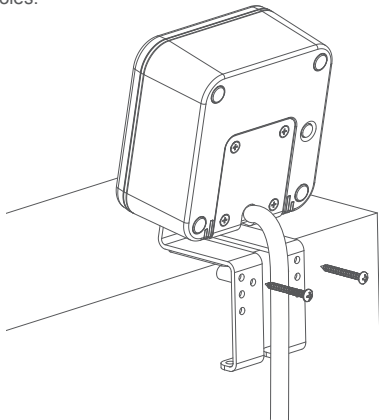

3. Plug directly into wall AC outlet. Do not plug into another surge protector or extension cord.

Technical Specifications

Continuous Duty Electrical Rating

125VAC 12A 60Hz 1500W

Maximum Energy Dissipation

900J L-N 300J L-G 300J N-G 300J

Maximum Spike Current

36000A L-N 12000A L-G 12000A N-G 12000A

UL Clamping Voltage (3-line)

UL962A 800V

AC Outlets Output

125V 12A

Powered USB Output -

5V/4.8 A shared

EMI/RFI Filtration

150kHz-1000MHz up to 40db

Surge Response Time (ns)

<20 ns

Working Temperature

-40°C – 80°C

Power Cord

6ft 15W 3-line

Housing Material

UL94V-0

Working Surroundings

Indoor Fix

Important Safeguards

- **CAUTION** – Do not install this device if there is not at least 10 meters (30 feet) or more of wire between the electrical outlet and the electrical service panel.
- Ensure that the unit is plugged into an AC120V~60Hz outlet. The use of incorrect outlets could cause the unit to malfunction or catch fire.
- To reduce the risk of fire or electrical shock, do not use this device with a receptacle in which the slot openings do not align with the blades.
- Do not allow children to operate the unit without adult supervision.
- Always ensure the product is unplugged from the electrical outlet before relocating or cleaning it.
- Keep the power cord and product away from heated surfaces.
- The unit should not be exposed to dripping or splashing and no objects filled with liquids, such as vases, should be placed on or around the product.
- Do not place or drop product into water or other liquids. If product falls into water, immediately unplug it from the electrical outlet; do not pull on power cord.
- Do not put any stress on the power cord where it connects to the product as the power cord could fray and break.
- Do not plug/unplug the product into/from the electrical outlet with a wet hand.
- Do not operate the product if it has a damaged or cut power cord or adapter, if wires are exposed, if it malfunctions, if it is dropped or damaged, or if it is dropped in or exposed to water.
- Place the unit where there is good air circulation.
- This product has no user-serviceable parts. Do not attempt to examine or repair this product yourself. Only qualified service personnel should perform the servicing; take the product to an electrical repair shop of your choice for inspection and repair.
- No open flame sources, such as candles, should be placed on the product.
- Product should only be used indoors and in dry locations. It should not be used with aquariums or other water-related products.

Limited 1 Year Warranty

Products are warranted by Brandstand against manufacturing defects in materials and workmanship under normal use for one year from the date of purchase. Defective products will be exchanged for the exact same item.

Return Policy

For a refund or exchange, products must be returned within 30 days of original purchase date. Customers must contact Brandstand to obtain a Return Merchandise Authorization (RMA) number and specific shipping instructions prior to returning the product. Any product returned without a RMA will be refused. Product must be in original box with original accessories and packaging in undamaged, clean and brand-new condition. Products that are incomplete, damaged or have been used will require a deduction in refund. There is a 30% restocking fee on all returned products. Refunds will be issued by check. Refund checks are mailed the 10th day from the date the product is returned. Delivery charges and customized products are non-returnable.

Disclaimer of Damages

In no event shall Brandstand, or its suppliers, be liable for indirect, incidental, or consequential damages, loss of profit, loss of use or data, or interruption of business, whether the alleged damages are labeled in tort, contract, or indemnity, even if Brandstand or its suppliers has been advised of the possibility of such damages. Some states do not allow the exclusion or limitation of incidental or consequential damages, so the above limitation may not apply.

Important: This product's USB outlets cannot be used as a USB hub and does not transmit data. The powered USB outlets on this unit are intended solely for charging devices that can be charged via a USB interface.

Brandstand
801 E. Campbell Rd. Suite 620
Richardson, TX 75081, USA
877-843-3681
www.brandstand.com

The Brandstand Difference

Surge Protection

All Brandstand Cubie products pass:

- UL1449 Surge Protection Devices Standard
- UL 962A for Furniture Power Distribution Units

Liquid Spill Testing

For enhanced safety, the Cubie Product Line was designed for and successfully passed a UL spill test conducted by our ETL testing lab.

Pass-Through Power

The pass-through power plug allows another device (i.e. lamp or alarm clock) to be plugged into the same wall outlet used by the Cubie Product.