

Valve Specifications

Models V20012 & V20038

Product of Italy

Description:




One-Piece Gas Appliance/Shutoff Ball Valves
Available in 1/2" MIP x 3/8" Flare & 1/2" MIP x 1/2" Flare
Forged Brass Construction
Removable Handle Rotates 180°
Chrome-Plated Brass Ball

Performance:

Rated for 1/2 PSIG and 5 PSI Gas
Working Temperature Range -4°F to 140°F

Compliance:

ANSI Z21.15 & CSA Can 1-9.1 for 1/2 PSI Gas
ANSI 3-88 (ASME B16-44) & CSA/GCA CR91-002 for 5 PSI Gas
ASME B1.20.1 (Pipe & Flare Threads)
SAE J513 (Flare Connections)

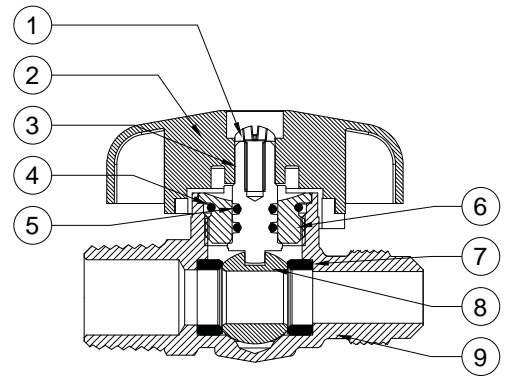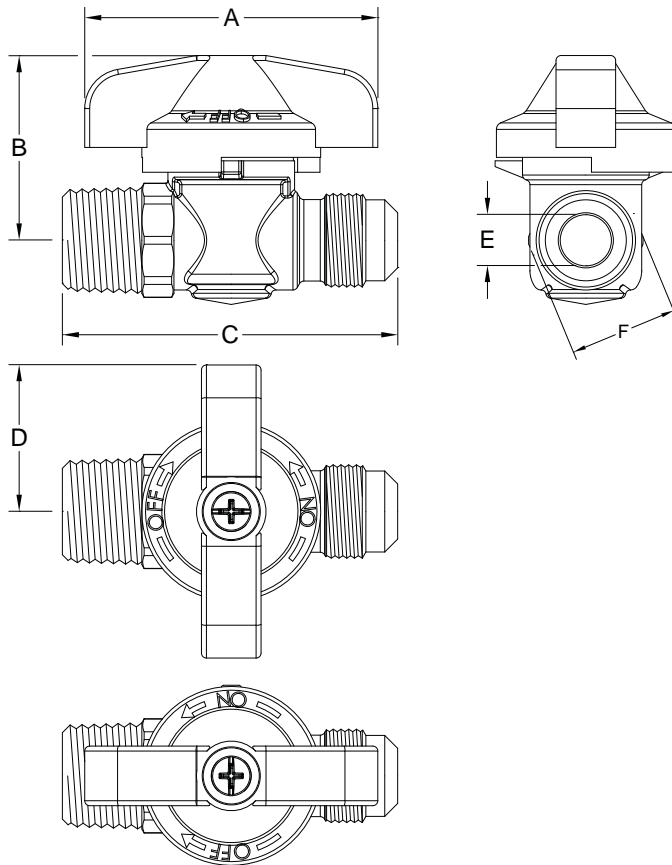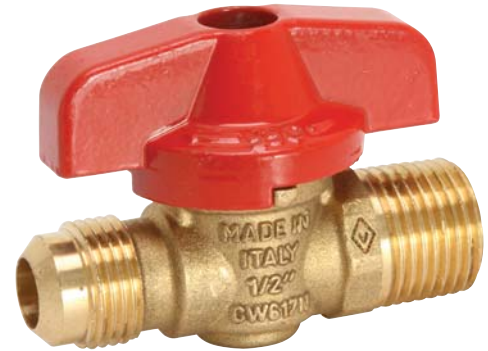

No.	Part	Material	Qty
1	Screw	Zinc-Plated Steel	1
2	Handle	Aluminum	1
3	Stem	C38500 Brass	1
4	Bonnet O-Ring	NBR	1
5	Stem O-Ring	NBR	2
6	Bonnet Nut	C38500 Brass	1
7	Ball Seal	PTFE	2
8	Ball	C37700 Brass	1
9	Body	C37700 Brass	1

CAUTION: Cross-tightening during installation can damage this valve.
Tighten only from the valve side being installed on the pipe.

MFG Model Series 9672

Premier One-Piece Gas Appliance/Shutoff Ball Valves

All Dimensions are Nominal.

Model	Size	A	B	C	D	E	F
V20012	3/8"	2-1/4"	1-1/2"	2-1/2"	1-1/8"	0.28"	7/8"
V20038	1/2"	2-1/4"	1-1/2"	2-5/8"	1-1/8"	0.41"	7/8"