

## FEATURES & SPECIFICATIONS

### INTENDED USE

Provides general illumination in residential and light commercial applications. Ideal for use in offices and all rooms in the home.

### CONSTRUCTION

Classic wraparound with solid wood oak ends in oak or white finishes. Low-profile styling, complements a variety of decors. Unique flush mounting system eliminates light leaks. Durable, clear (oak finish only) or milk white acrylic diffuser provides wide spread, uniform illumination. Clip-on diffuser provides easy access for cleaning and maintenance.

### OPTICS

Utilizes linear T8 lamps for energy efficiency, superior color rendering and long life (not included).

### ELECTRICAL

Standard with 120 volt, 60Hz electronic ballast ensures no flickering and quiet operation without interfering with other electronics. Also available in other ballast configurations.

For use with non-dimmable switches only.

### INSTALLATION

All mounting hardware included.

### LISTINGS

RE ballast fixtures are UL listed and CSA certified (standard), suitable for damp locations. For non-RE ballast fixtures, UL (standard) and for CSA certified (see options).

### WARRANTY

2-year limited warranty. Complete warranty terms located at [www.acuitybrands.com/CustomerResources/Terms\\_and\\_conditions.aspx](http://www.acuitybrands.com/CustomerResources/Terms_and_conditions.aspx)

Actual performance may differ as a result of end-user environment and application.

Note: Specifications subject to change without notice.

Catalog Number
Notes
Type

Indoor Decorative


# Wraparound Square Profile – Wood Ends Linear Flush Mount

TRADITIONAL SERIES  
Linear T8 Fluorescent



DIMENSIONS						
Nominal size	Lamp configuration	Model number	Number of lamps	(A) Width inches (cm)	(B) Length inches (cm)	(C) Depth inches (cm)*
1' x 2'		10635	(2) 17W linear T8	8-1/2" (21.6)	25-1/2" (64.8)	3" (7.6)
1' x 4'		10636	(2) 32W linear T8	8-1/2" (21.6)	49-1/2" (125.7)	3" (7.6)
1-1/2' x 4'		10637	(4) 32W linear T8	13-7/8" (32.2)	49-1/2" (125.7)	3" (7.8)

\*Extension from ceiling.  
All dimensions are inches (centimeters) unless otherwise indicated.

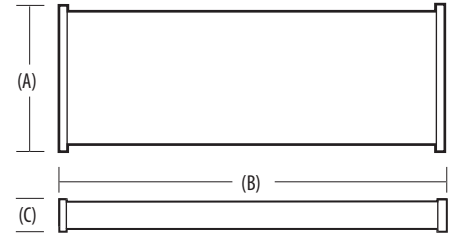

### ORDERING INFORMATION

Lead times will vary depending on options selected. Consult with your sales representative.

Example: 10635RE ACW OA

Series <sup>1,2</sup>	Residential Ballast <sup>3</sup>	Diffuser	Finish	Lamp <sup>4</sup>	Ballast/voltage <sup>5</sup>	Options
<b>10635</b>	<b>RE</b> 120 volt residential electronic ballast (standard)  <b>(blank)</b> Other voltage and ballast types available (see ballast/voltage)	<b>(blank)</b> Clear	<b>OA</b> Oak	<b>(blank)</b> RE ballast fixtures only	<b>(blank)</b> RE ballast fixtures only	<b>GEB</b> Electronic ballast, <20%THD  <b>GEB10IS</b> T8 electronic ballast, <10% THD, instant start  <b>CSA</b> CSA Certified <sup>6</sup>
<b>10636</b>				<i>Non-RE ballast fixtures only</i>	<b>MVOLT</b> Multi-volt	
<b>10637</b>				<b>17</b> 17W T8 (2' fixtures only) <b>32</b> 32W T8 (4' fixtures only)	<b>120</b> 120 volt <b>277</b> 277 Volt <b>347</b> 347 Volt	

### Notes

- Lamps not included.
- Use with non-dimmable switches only.
- Residential electronic ballast standard and requires RE designation.
- No designation for lamp type is required on RE ballast fixtures.
- No designation for ballast/voltage type is required on RE ballast fixtures.
- CSA standard on RE ballast fixtures.

## Wraparound Square Profile – Wood Ends Linear Flush Mount

---

### PHOTOMETRICS

Full photometric data report available within 2 weeks from request. Consult factory.