



LOCATION		DATE
PREPARED BY		QUANTITY
COMMENTS		FIXTURE TYPE
CATALOG NUMBER		

Cameron Overbed CMB Series

Features

The white acrylic front panel provides a soft forward illumination to this contemporary three lamp T8 wall mount senior care overbed light. The wood trim accents identify the graceful shape. The Cameron provides both ambient and task light with a four way pull switch, standard (120 volt only). Top diffuser is clear, and bottom diffuser is frosted white acrylic.

Construction

The ballast/wiring channel is formed from 22-gauge steel and is provided with obround mounting slots and wiring access. An internal divider provides separate lamp compartments for controlled up light and down light. The decorative frame is fabricated from solid wood. Fixture can mount horizontally only. Power connections can be made in the fixture wiring channel or in a standard junction box (not included).

Finish

All wood parts are finished high gloss stained cherry or espresso. Internal housing is finished in a lighting grade baked white enamel.

Diffuser

Diffuser is 0.090" thick matte white acrylic for the front panel and down light, and clear frosted acrylic for up light. Frame mounts to electrical channel with two decorative screws.

Electrical

This unit is wired with two UL listed electronic high power factor instant start ballasts for one up, two down T8 lamps at 120V- 50/60 Hz AC operation. Four position, three circuit pull switch (on up, on down, on both, all off) are standard and located toward the right end. LED nightlight and on/off pull switch is included.

Lamping

For use with (3) T8 linear lamps, not included.


Certification

All fixtures are cULus listed for damp locations.

Options (Consult Factory)

120-277 universal voltage available without switch and nightlight.

Specifications and dimensions
subject to change without notice.

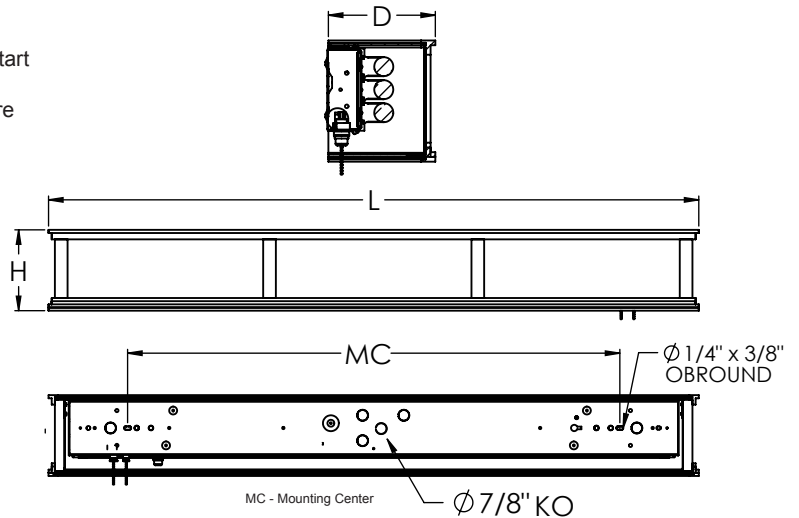

Ordering Information:

Cherry	Espresso	Qty.	Lamp	H	L	D	MC
CMB325CHE8	CMB325ESE8	3	F25T8	6"	39-5/8"	5-3/4"	26-3/4"
CMB332CHE8	CMB332ESE8	3	F32T8	6"	51-5/8"	5-3/4"	38-3/4"