

## FEATURES & SPECIFICATIONS

### INTENDED USE

Provides general illumination in residential and light commercial applications. Ideal for use in offices and all rooms in the home. **If required for commercial application or operation more than eight (8) hours per day, consult factory for available options.**

### CONSTRUCTION

Decorative contoured distinctive linear design complements a variety of decors. Durable, milk white acrylic diffuser provides wide spread, uniform illumination and allows easy access for cleaning and maintenance. Available in two sizes: 1'x4', or 1-1/2'x4'.

### OPTICS

Utilizes (4) linear T8 fluorescent lamps for energy efficiency, superior color rendering and long life (not included).

### ELECTRICAL

Standard with electronic ballast (120 volt, 60 Hz) ensures no flickering and quiet operation without interfering with other electronics. Also available in other ballast configurations.

For use with non-dimmable switches only.

### INSTALLATION

All mounting hardware included.

### LISTINGS

UL Listed to US and Canadian safety standards. For non-RE ballast fixtures, UL (standard) and for CSA certified (see options).

### WARRANTY

2-year limited warranty. Complete warranty terms located at [www.acuitybrands.com/CustomerResources/Terms\\_and\\_conditions.aspx](http://www.acuitybrands.com/CustomerResources/Terms_and_conditions.aspx)

**Note:** Actual performance may differ as a result of end-user environment and application. Specifications subject to change without notice.

Catalog Number
Notes
Type

Indoor General Purpose


# Litepuff Linear Flush Mount

Linear T8 Fluorescent



DIMENSIONS						
Nominal size	Lamp configuration	Model number	Number of lamps	(A) Width inches (cm)	(B) Length inches (cm)	(C) Extension inches (cm)*
1' x 4'		10640	(2) 32W Linear T8	11-1/4" (28.6)	51-1/2" (130.8)	5-1/2" (14.0)
1-1/2' x 4'		10642	(4) 32W Linear T8	16-5/8" (42.2)	51-1/2" (130.8)	5-1/2" (14.0)

\*Extension from ceiling.  
All dimensions are inches (centimeters) unless otherwise indicated.

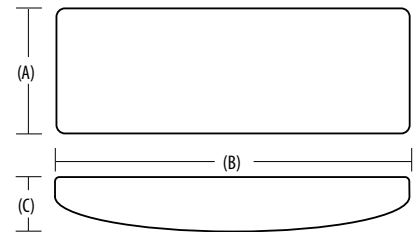

### ORDERING INFORMATION

For shortest lead times, configure products using **bolded options**.

**Example: 10640RE**

Series <sup>1,2</sup>	Residential ballast <sup>3</sup>	Lamp <sup>4</sup>	Ballast/Voltage <sup>5</sup>
<b>10640</b> 1'x4' - (2) 32W linear T8 lamps	<b>RE</b> 120 volt residential electronic ballast (standard)	(blank) RE ballast fixtures only	(blank) RE ballast fixtures only
<b>10642</b> 1-1/2'x4' - (4) 32W linear T8 lamps			

Replacement Parts: Order as separate catalog number.	
DPUFF	1' x 4' white acrylic diffuser
D15PUFF	1-1/2' x 4' white acrylic diffuser

### Notes

- Lamps not included.
- Use with non-dimmable switches only.
- Residential electronic ballast standard and requires RE designation.
- No designation for lamp type is required on RE ballast fixtures.
- No designation for ballast/voltage type is required on RE ballast fixtures.
- CSA standard on RE ballast fixtures.

# Litepuff Linear Flush Mount

---

## PHOTOMETRICS

Full photometric data report available within 2 weeks from request. Consult factory.