

TUDOR COLLECTION



SPECIFICATIONS

- 120V INPUT VOLTAGE, 50/60Hz
- CONSTANT CURRENT
- AMBIENT OPERATING TEMPERATURE -40°C (-40°F) TO +50°C (122°F)
- ESTIMATED 50,000 HRS L₇₀*
- 5 YEAR WARRANTY
- DIMMABLE
- MOLDED OF DURABLE NON-CORROSIVE UV RESISTANT RESINS
- POLYPROPYLENE HOUSING AND ACRYLIC DIFFUSER
- FITS MOST 3 INCH DIAMETER POSTS (NOT INCLUDED)
- UL LISTED FOR WET LOCATIONS
- STANDARD PACK QTY: 6



RoHS compliant

FT251

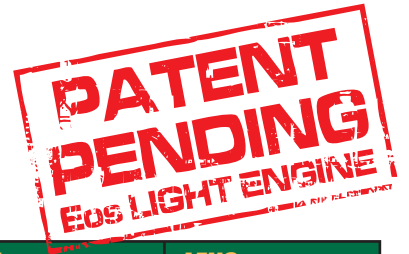

EXAMPLE # **FT251-LE800C-BF**

STYLE #	SOURCE/WATTAGE	COLOR TEMP	BODY	LENS
FT251 = POST	LE800 = 12W POWER INPUT 800 LUMENS (SOURCE) HIGH POWER FACTOR >65 LUMENS PER WATT**	C = 3000K W = 4000K	B = BLACK W = WHITE	F = FROSTED

LE800W LED REPLACEMENT PARTS

L08-AC120R-W = 3000K 1200 LUMEN ARRAY
L08-AC120R-C = 4000K 1200 LUMEN ARRAY

* DATA PER LM79/LM80/TM21 AVAILABLE UPON REQUEST

** ESTIMATED FROM LED SOURCE

