

ELECTRONIC BALLAST SINGLE LAMP

328009

- One Lamp
- Small Case Size
- Lightweight
- Energy Saving



Features & Benefits

Suitable for one FC12T9(32W) lamp
 Prewired with 2G10 plug
 Class A Sound Rating
 End of Lamp Life Protection
 More efficient compared to standard magnetic ballasts
 Lead wires do not interfere with mounting holes

Contains No PCBs
 Eliminates strobing
 Thermal potting
 Metal enclosure
 Rapid Start



RoHS
compliant


SPECIFICATIONS

- Operating Voltage: 120 VAC \pm 10%
- Frequency: 50/60Hz
- Protection: Class P Inherent Thermal


- Protection
- Regulatory Approvals: UL, CUL Listed
 - Min. Starting Temp: 0°F (-17.78°C)

- Max. Case Temp: 158°F (75°C)
- Over Current: Fuse
- Type 1 Outdoor, Normal Power Factor

DIMENSIONS

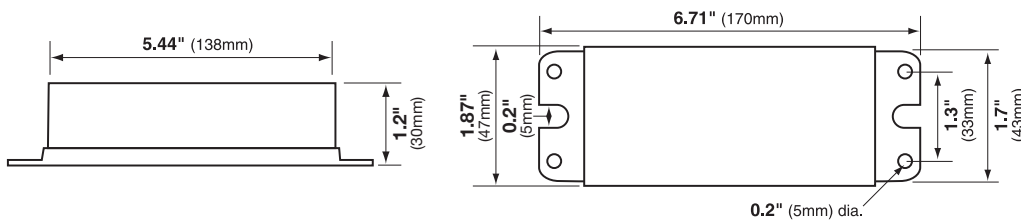

WIRING DIAGRAM



Weight: 13 oz. Case Quantity: 40pcs Case Weight: 29 lbs Standard Lead Length: black/white-12" blue/red-10 1/4"

Line Voltage	Lamp Type	Line Current	Input Power	Power Factor	Crest Factor	Ballast Factor	THD Percent	Min Start Temp
120	FC12T9	0.5	20.6	0.53	1.7	0.5	160	0°F



For More Information On Liteco Products
 call us at 888-726-0190