

ELECTRONIC BALLAST TWO LAMP

328010

- Two Lamp
- Small Case Size
- Lightweight
- Energy Saving



Features & Benefits

Suitable for one FC12T9(32W) and one FC8T9(22W) lamp
 Prewired with 2G10 plug
 Class A Sound Rating
 End of Lamp Life Protection
 More efficient compared to standard magnetic ballasts
 Lead wires do not interfere with mounting holes


Contains No PCBs
 Eliminates strobing
 Thermal potting
 Metal enclosure
 Rapid Start




SPECIFICATIONS

- Operating Voltage: 120 VAC \pm 10%
- Frequency: 50/60Hz
- Protection: Class P Inherent Thermal Protection
- Regulatory Approvals: UL, CUL Listed
- Over Current: Fuse
- Min. Starting Temp: 0°F (-17.78°C)
- Max. Case Temp: 158°F (75°C)
- FCC, 47 CFR, Part 18 Consumer Limits
- Type 1 Outdoor, Normal Power Factor

DIMENSIONS

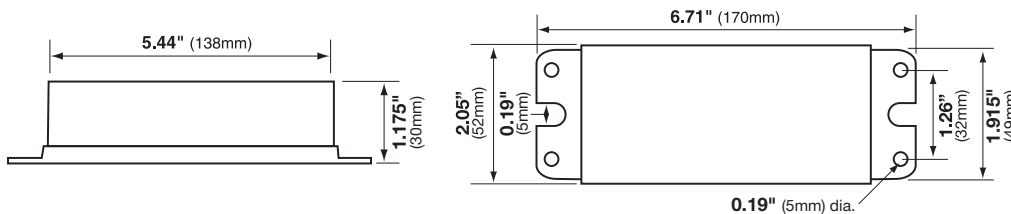

WIRING DIAGRAM



Weight: 13 oz. Case Quantity: 40pcs Case Weight: 35 lbs Standard Lead Length: black/white-12" blue/yellow- 10 1/4"

Line Voltage	Lamp Type	Line Current	Input Power	Power Factor	Crest Factor	Ballast Factor	THD Percent	Min Start Temp
120	FC12T9 & FC8T9	0.87	46.7	0.53	1.7	0.77	147	0°F



For More Information On Liteco Products
 call us at 888-726-0190