

#19 Heavy Duty Ribbed Round Nose

Manufacturer


Roppe Corporation
1602 N. Union Street
P.O. Box 1158
Fostoria, Ohio USA 44830-1158
Website - www.roppe.com
t: (419) 435.8546 tf: (800) 537.9527
f: (419) 435.1056
e-mail: sales@roppe.com

Product Description

Roppe Vinyl Stair Treads are designed for use on all interior stairs, including pan-filled concrete steps and wooden steps. Roppe vinyl stair treads are non-conductive and resist scuffing, gouging and most chemicals and common substances. Roppe stair treads cushion footsteps, reduce noise, and help prevent slipping.

Features

100% Recyclable	Does Not Require a Finish
ADA Compliant	Optimized for Visually Impaired
Excellent Slip Resistance	Excellent Chemical Resistance
FloorScore® Certified	Qualifies for LEED® Credits

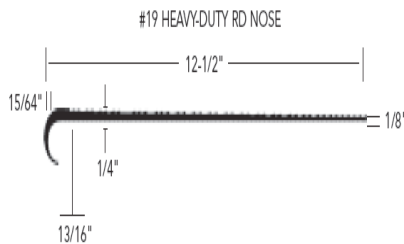

#19 Heavy Duty Ribbed Round Nose Tread

Nose Type: Round
Nose Length: 7/8" (22.2 mm)
Leading Edge Thickness: 1/4" (6.35 mm)
Back Edge Thickness: 1/8" (3.2 mm)
Nominal Tread Depth: 12 1/4" (311.2 mm)
Tread Lengths: 42", 48" and 72"
(Optional) Safety Strip Width: One 2" (50.8 mm) insert or Two 3/4" (19 mm) insert
Safety Strip Spacing: ~3/4" (19 mm) From Nose, 1 1/4" (31.75 mm) between
Safety Strip Material: Carborundum
Weight Per Lineal Foot: 1.8 lbs.
Treads Per Carton: 6

Technical Data

LEED v2009 IEQ Credit 4.1: Qualifies
LEED v2009 IEQ Credit 4.3: Qualifies

ASTM F2169-Resistant Stair Treads: Type TV, Class 2, Group 1 & 2, Grade 1
ASTM F-2240 - Hardness: Shore A, 85
ASTM E648 (NFPA 253) - Critical Radiant Flux: Class I, > 0.45 W/cm2
ASTM E662 (NFPA 258) - Smoke Density: Passes, <450
ASTM F925 - Chemical Resistance: Passes
ASTM D2047 - Slip Resistance: >0.6
ASTM F1515 - Light Stability: Passes
ASTM F1514 - Heat Stability: Passes
Acclimation Time: 48 Hours
Storage & Acclimation Temperature: 65 ° - 85 ° F

Approved Adhesive* ([Visit our website for complete Adhesive recommendations](#))

AW-510 Acrylic Wet-Set Adhesive
EN-610 Epoxy Nose Filler Adhesive
C-630 Contact Adhesive
TP-620 Pressure Sensitive Tape
MS-700 Modified Silane Adhesive
EW-710 Epoxy Wet-Set Adhesive

Installation* ([Visit our website for complete Installation instructions](#))

All materials are to be delivered to the installation location within 48 hours of installation in its original packaging with labels intact. Store products in a dry area protected from the weather with temperatures maintained between 65° F (19°C) and 85° F (30°C). DO NOT stack pallets. Remove all plastic wrapping and strapping from the pallets and un-box all material in the installation area at least 48 hours prior to installation. Stair Treads must be stored horizontally and placed on a smooth, level, dry surface, which supports the entire width of the stair treads. Ensure substrate is suitably prepared prior to installation.

Maintenance* ([Visit our website for complete Maintenance instructions](#))

Sweep, dust mop or vacuum the stair treads to remove dirt and other particulates.

Availability, Cost & Samples

Roppe Flooring products are sold through distribution. To locate the nearest distributor, visit www.roppe.com. or send an email to solutions@roppe.com

Technical Document Support

Additional product resources and technical documents are available online at www.roppe.com. For additional technical support, send an e-mail to solutions@roppe.com

Warranty

Roppe Provides a 3 year Limited Warranty on all Light Duty Stair Treads and a 5 year Limited Warranty on all Heavy Duty Stair Treads. For additional information, see associated Warranty documents.

*For complete adhesive, installation & maintenance instructions, visit www.roppe.com