

## #16 Light Duty Ribbed Square Nose

### Manufacturer


Roppe Corporation  
1602 N. Union Street  
P.O. Box 1158  
Fostoria, Ohio USA 44830-1158  
Website - [www.roppe.com](http://www.roppe.com)  
t: (419) 435.8546 tf: (800) 537.9527  
f: (419) 435.1056  
e-mail: [sales@roppe.com](mailto:sales@roppe.com)

### Product Description

Roppe Vinyl Stair Treads are designed for use on all interior stairs, including pan-filled concrete steps and wooden steps. Roppe vinyl stair treads are non-conductive and resist scuffing, gouging and most chemicals and common substances. Roppe stair treads cushion footsteps, reduce noise, and help prevent slipping.

### Features

100% Recyclable	Does Not Require a Finish
ADA Compliant	Optimized for Visually Impaired
Excellent Slip Resistance	Excellent Chemical Resistance
FloorScore® Certified	Qualifies for LEED® Credits

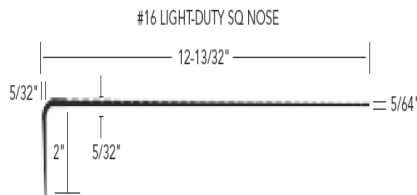

### #16 Light Duty Ribbed Square Nose Tread

Nose Type: Square  
Nose Length: 2" (39.69 mm)  
Leading Edge Thickness: 5/32" (4 mm)  
Back Edge Thickness: 5/64" (2 mm)  
Nominal Tread Depth: 12 1/4" (311.2 mm)  
Tread Lengths: 42", 48" and 72"  
(Optional) Safety Strip Width: One 2" (50.8 mm) insert or Two 3/4" (19 mm) insert  
Safety Strip Spacing: ~3/4" (19 mm) From Nose, 1 1/4" (31.75 mm) between  
Safety Strip Material: Carborundum  
Weight Per Lineal Foot: 1.3 lbs.  
Treads Per Carton: 6

### Technical Data

LEED v2009 IEQ Credit 4.1: Qualifies  
LEED v2009 IEQ Credit 4.3: Qualifies

ASTM F2169-Resistant Stair Treads: Type TV, Class 2, Group 1 & 2, Grade 1  
ASTM F-2240 - Hardness: Shore A, 85  
ASTM E648 (NFPA 253) - Critical Radiant Flux: Class I, > 0.45 W/cm2  
ASTM E662 (NFPA 258) - Smoke Density: Passes, <450  
ASTM F925 - Chemical Resistance: Passes  
ASTM D2047 - Slip Resistance: >0.6  
ASTM F1515 - Light Stability: Passes  
ASTM F1514 - Heat Stability: Passes  
Acclimation Time: 48 Hours  
Storage & Acclimation Temperature: 65 ° - 85 ° F

### Approved Adhesive\* ([Visit our website for complete Adhesive recommendations](#))

AW-510 Acrylic Wet-Set Adhesive  
EN-610 Epoxy Nose Filler Adhesive  
C-630 Contact Adhesive  
TP-620 Pressure Sensitive Tape  
MS-700 Modified Silane Adhesive  
EW-710 Epoxy Wet-Set Adhesive

### Installation\* ([Visit our website for complete Installation instructions](#))

All materials are to be delivered to the installation location within 48 hours of installation in its original packaging with labels intact. Store products in a dry area protected from the weather with temperatures maintained between 65° F (19°C) and 85° F (30°C). DO NOT stack pallets. Remove all plastic wrapping and strapping from the pallets and un-box all material in the installation area at least 48 hours prior to installation. Stair Treads must be stored horizontally and placed on a smooth, level, dry surface, which supports the entire width of the stair treads. Ensure substrate is suitably prepared prior to installation.

### Maintenance\* ([Visit our website for complete Maintenance instructions](#))

Sweep, dust mop or vacuum the stair treads to remove dirt and other particulates.

### Availability, Cost & Samples

Roppe Flooring products are sold through distribution. To locate the nearest distributor, visit [www.roppe.com](http://www.roppe.com). or send an email to [solutions@roppe.com](mailto:solutions@roppe.com)

### Technical Document Support

Additional product resources and technical documents are available online at [www.roppe.com](http://www.roppe.com). For additional technical support, send an e-mail to [solutions@roppe.com](mailto:solutions@roppe.com)

### Warranty

Roppe Provides a 3 year Limited Warranty on all Light Duty Stair Treads and a 5 year Limited Warranty on all Heavy Duty Stair Treads. For additional information, see associated Warranty documents.

**\*For complete adhesive, installation & maintenance instructions, visit [www.roppe.com](http://www.roppe.com)**