

#98 Vantage Design Tread

Manufacturer


Roppe Corporation
 1602 N. Union Street
 P.O. Box 1158
 Fostoria, Ohio USA 44830-1158
 Website - www.roppe.com
 t: (419) 435.8546 tf: (800) 537.9527
 f: (419) 435.1056
 e-mail: sales@roppe.com

Product Description

Roppe Rubber Stair Tread are specifically designed for use on all interior stairs, including pan-filled concrete and wood steps. Roppe Rubber Stair Treads are made from specially formed compression-molded high-grade synthetic rubber compound and is non-conductive. Each Product is also a solid, homogeneous and resilient rubber stair tread.

Features

- PVC Free
- Extremely Durable
- ADA Compliant
- Excellent Slip Resistance
- FloorScore® Certified
- Does Not Require A Finish
- Excellent Chemical Resistance
- Recyclable (IMPACT Program)
- Optimized For Visually Impaired
- Qualifies for LEED® Credits

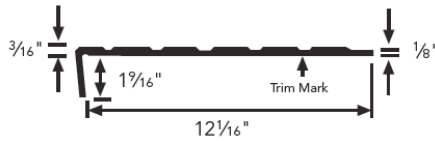

#98 Vantage Design Tread

Nose Type: Square with Taper & Relief Cut
 Nose Length: 1 9/16" (39.69 mm)
 Leading Edge Thickness: 13/64" (5.15 mm)
 Back Edge Thickness: 1/8" (3.2 mm)
 Tread Depth: 12 1/16" (306.38 mm)
 Tread Lengths: 36", 42", 48", 54", 60", 72", 84", #96, #108
 (Optional) Safety Strip Width: One 2" (50.8 mm) insert
 Safety Strip Spacing: ~3/4" (19 mm) From Nose
 Safety Strip Material: Carborundum, Ribbed or Smooth
 Coordinating Landing Tile: #996 Vantage Design
 Weight Per Lineal Foot: 2 lbs.
 Treads Per Carton: 6 (4 for all treads over 72")
 Available Color Groups: Solid Color, Symmetry, Marble, Fiesta, Marble Fiesta, SafeTcork & SafeTcork Fiesta.
 *Performance Compound Treads are available in solid color only.

Technical Data

LEED v2009 IEQ Credit 4.1: Qualifies
 LEED v2009 IEQ Credit 4.3: Qualifies
 ASTM F2169-Resilient Stair Treads: Type TS, Class 1 & 2, Group 1 & 2, Grade 1
 ASTM E648 (NFPA 253) - Critical Radiant Flux: Class I, > 0.45 W/cm²
 ASTM E662 (NFPA 258) - Smoke Density: Passes, <450
 CAN/ULC-S102.2 - Surface Burning: FSR 115, SDS 275
 ASTM F925 - Chemical Resistance: Passes
 ASTM D2047 - Slip Resistance: >0.6
 ASTM F1514 - Heat Stability: Passes
 Acclimation Time: 48 Hours
 Storage & Acclimation Temperature: 65 ° - 85 ° F

Approved Adhesive* (Visit our website for complete Adhesive recommendations)

- AW-510 Acrylic Wet-Set Adhesive
- EN-610 Epoxy Nose Filler Adhesive
- C-630 Contact Adhesive
- TP-620 Pressure Sensitive Tape
- MS-700 Modified Silane Adhesive
- EW-710 Epoxy Wet-Set Adhesive

Installation* (Visit our website for complete Installation instructions)

All materials are to be delivered to the installation location within 48 hours of installation in its original packaging with labels intact. Store products in a dry area protected from the weather with temperatures maintained between 65° F (19°C) and 85° F (30°C). DO NOT stack pallets. Remove all plastic wrapping and strapping from the pallets and un-box all material in the installation area at least 48 hours prior to installation. Stair Treads must be stored horizontally and placed on a smooth, level, dry surface, which supports the entire width of the stair treads. Ensure substrate is suitably prepared prior to installation.

Maintenance* (Visit our website for complete Maintenance instructions)

Sweep, dust mop or vacuum the stair treads to remove dirt and other particulates.

Availability, Cost & Samples

Roppe Flooring products are sold through distribution. To locate the nearest distributor, visit www.roppe.com. or send an email to solutions@roppe.com

Technical Document Support

Additional product resources and technical documents are available online at www.roppe.com. For additional technical support, send an e-mail to solutions@roppe.com

Warranty

Roppe Provides a 3 year Limited Warranty on all Light Duty Stair Treads and a 5 year Limited Warranty on all Heavy Duty Stair Treads. For additional information, see associated Warranty documents.

*For complete adhesive, installation & maintenance instructions, visit www.roppe.com