

<b>LED</b>	25,000 Hours average rated life, 120 Volts
------------	--

### Applications:



Ideal for applications where uniform multi-directional light output is required.

- + Table Lamps
- + Floor Lamps
- + Sconces
- + Ceiling Fixtures



### Features and Benefits

- High Efficiency A-Lamp (40W, 60W replacements)
- Light Output in all directions to suit many applications
- Consistent white frosted cover – no obstructions, shadows, or non-standard colors. Looks like incandescent in all applications.
- Fits in all applications
- Long Life: 25,000 hours
- Smooth, uniform dimming
- Consistent color within 3 MacAdam ellipse tolerance (2700K, 3000K, 4100K, 5000K)
- UL Damp Location

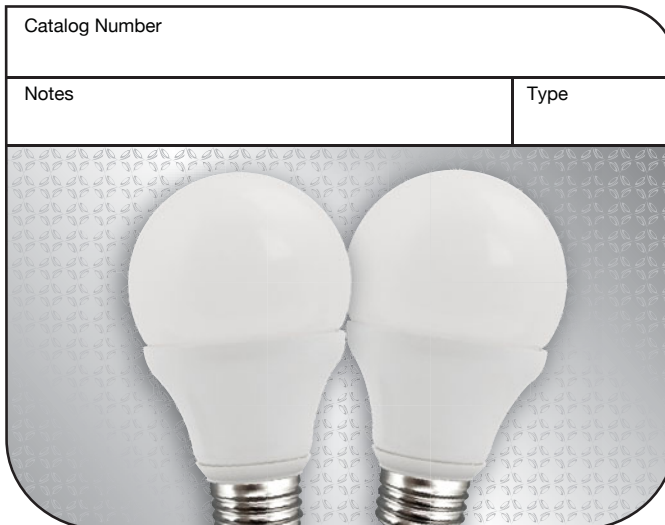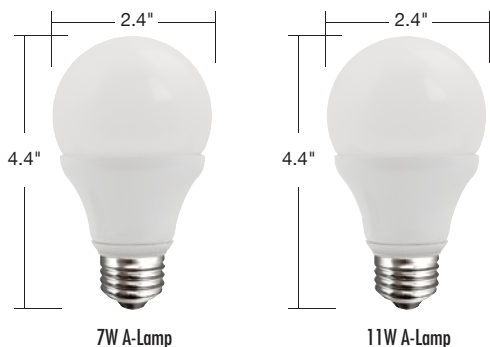

### Specifications

Input Line Voltage:	120 VAC
Input Power	See Chart
Input Line Frequency	50/60HZ
Lamp Life (Rated)	25,000 hrs
Minimum Starting Temp	-20°C
Maximum Operating Temp	40°C
CRI	82
Dimming	Yes

Warranties and Certifications:	Item #	Description	Voltage	Wattage	Incandescent Wattage Comparison	Lumens	LPW	M.O.L. (inches)	Diameter (inches)	CCT	CRI	Case Quantity	STK/MTO	
 <b>5 YEAR WARRANTY*</b> For the most up-to-date specs, please visit <a href="http://www.tcp.com">www.tcp.com</a> <small>*Based on 12 hours use per day</small>	<b>7W A-Lamp</b>													
	LED7E26SA1927K	LED 7W A-LAMP - 2700K	120	7	40	450	64.3	4.4	2.4	2700K	82	12	STK	
	LED7E26SA1930K	LED 7W A-LAMP - 3000K	120	7	40	475	67.9	4.4	2.4	3000K	82	12	STK	
	LED7E26SA1941K	LED 7W A-LAMP - 4100K	120	7	40	500	71.4	4.4	2.4	4100K	82	12	STK	
	LED7E26SA1950K	LED 7W A-LAMP - 5000K	120	7	40	530	75.7	4.4	2.4	5000K	82	12	STK	
	<b>11W A-Lamp</b>													
	LED11E26SA1927K	LED 11W A-LAMP - 2700K	120	11	60	800	72.7	4.4	2.4	2700K	82	12	STK	
	LED11E26SA1930K	LED 11W A-LAMP - 3000K	120	11	60	825	75.0	4.4	2.4	3000K	82	12	STK	
	LED11E26SA1941K	LED 11W A-LAMP - 4100K	120	11	60	850	77.3	4.4	2.4	4100K	82	12	STK	
	LED11E26SA1950K	LED 11W A-LAMP - 5000K	120	11	60	900	81.8	4.4	2.4	5000K	82	12	STK	