

PRODUCT SPECIFICATIONS

2x2 Beveled Edge Luminaire Flatlight™ Fixture



SPECIFICATIONS	
Model Number	FLT22R27MD3644-A
Power	49W
AC Voltage, Frequency	90~130V, 50/60 Hz
Color Temp (nom.)	2700K
Operation Temp	- 20°C ~ 40°C
CRI	≥80
Lumen Output (min.)	4300 lm
Dimming	Yes*
Lifetime Rating	50,000 Hrs

ADVANTAGES

- Internal driver allows for TruFlat™ Mounting
- Edge-lit LED provides a thin energy efficient light source with excellent uniformity
- 30° bezel edge design for a sleek look
- Uses about 80%** less energy than standard household light fixtures
- Low heat dissipation - reduce HVAC costs
- Low energy consumption
- Replaces current household lights
- Environmentally positive - RoHS compliant
- 5 year limited warranty

PACKAGING	
Weight (Flatlight) (±0.5 lb)	11.46 lbs
Weight (Mount)	2.8 lbs
Size (L x W x H) (±0.1 in)	23.75 x 23.75 x 0.55 in
Box Dimensions	25.9 x 26.5 x 2.6 in
Gross Weight	16.46 lbs
UPC	8 55158 00315 7

APPLICATIONS

Suitable for dry and damp locations

HARD SURFACE



HANGING



EMBEDDED IN TRIM



INCLUDED IN BOX


- Mounting plate
- Installation guide
- Installation bracket
- Two-wire connector
- Grounding wire
- Wire Nuts (3)
- Junction box screws (2)
- Toggle bolts (4)
- Dry wall screws (4)

Contact Information 888-925-7494 · www.pixilighting.com


*With select dimming controls

**Compared with incandescent lighting

Polar Candela Distribution

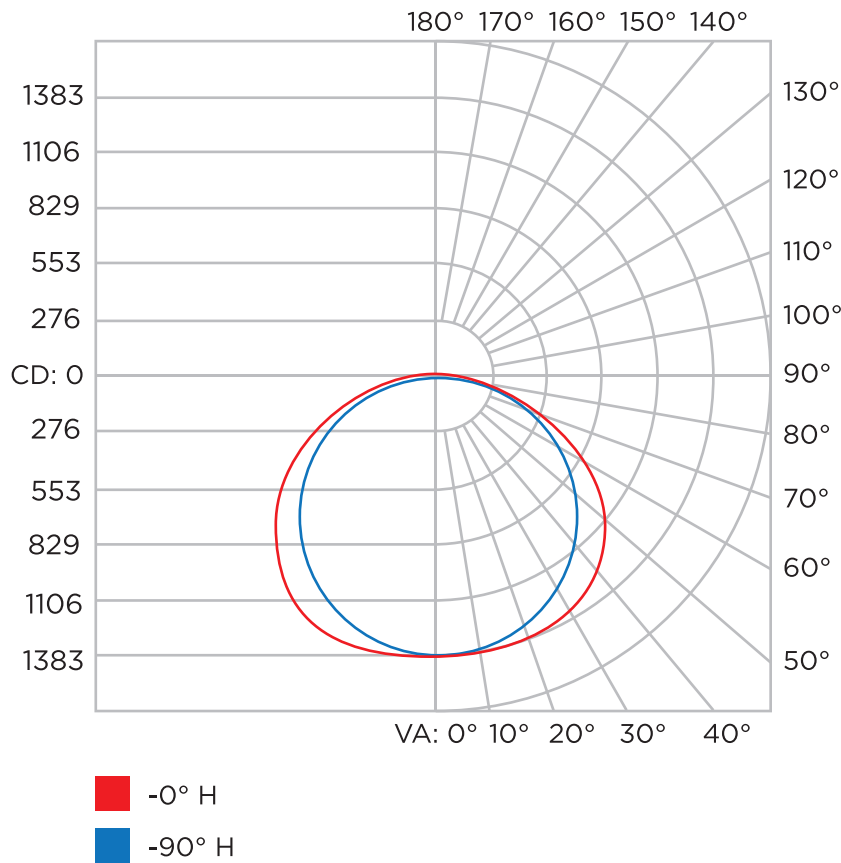

Illuminance at a Distance

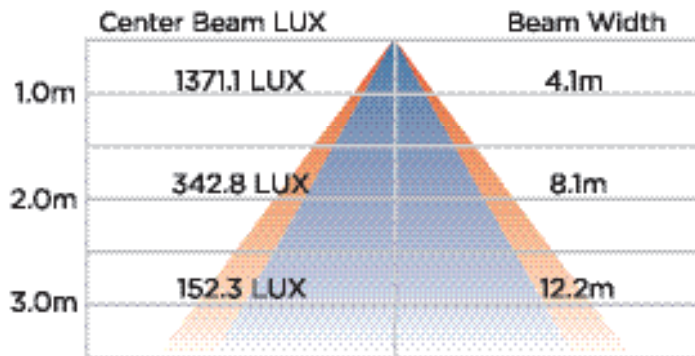

Contact Information 888-925-7494 · www.pixilighting.com

*With qualified dimming controls
 **Compared with incandescent lighting