


L-PL 8.5W G24D

Benchmark II - LED PL Lamp

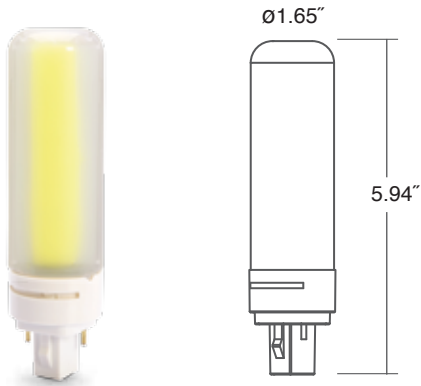

PERFORMANCE OVERVIEW

Product Part #	74403	74404	74405
Bulb Type	PL	PL	PL
Base Type	G24D-2P	G24D-2P	G24D-2P
Correlated Color Temp (CCT)	2700	4000	6000
Lumens (Lm)	600	600	600
CRI	> 80	> 80	> 80
Efficacy	70.6	70.6	70.6
Beam Angle	90°	90°	90°

ELECTRICAL CHARACTERISTICS

Wattage	8.5W
Voltage	100-285V AC
Power Factor	> 0.9
Dimming	Non-Dimmable
Operating Temperature	-20° to 45°

MECHANICAL SPECIFICATIONS

Height (")	5.94
Weight (lb)	0.30
Diameter (")	1.65

FEATURES AND BENEFITS

- 600 Lumens
- Ballast Compatible* or Direct Wire
- Consumes Up to 40% Less Energy
- Extra Long Light (25,000 Hours)
- Cool to Touch
- Contains No Mercury
- Up to 5 Times the Life of PL(C)
- Shatterproof Design
- Contains ViriTrue™ White Technology

COMPATIBILITY

*Magnetic Transformers	Ok
Direct AC	Ok
Electronic Transformers	NO
Ingress Back Up Power	Ok*

Not for use with electronic transformers and can void the warranty.

LOGISTICS

SKU	UPC
74403	818549016006
74404	818549016013
74405	818549016020
Retail Pack	6
Contractor Pack	36
Contractor Pack Dimensions	18.125" x 8.250" x 8.125"
Weight (lb) X.X Cube (cft)	14.04 lbs / 0.7031 cft
Retail Pack Dimensions	TBD
Weight (lb) X.X Cube (cft)	TBD

STANDARDS AND QUALIFICATIONS

- ROHS Compliant
- cETLus Listed



PRODUCT DESCRIPTION

VIRIBRIGHT LED PL Retrofit Lamps are designed to replace plug in (PL) Compact fluorescent lamps (CFLs). VIRIBRIGHT LED PL lamps are ballast compatible with magnetic ballast or direct wire applications and engineered for horizontal applications. Available in 8.5W, with GU24, GX23, G24d, G24Q base options, the VIRIBRIGHT LED PL lamps with our new patent pending remote phosphor technology deliver uniform consistency, and a long 25,000-hour life.

VIRIBRIGHT LED PL lamps replace 13- and 18-watt inefficient PL CFLs, and retrofit a variety of commercial fixtures to include recessed cans, sconces, and ceiling fixtures most commonly found to light retail stores, hotels and apartment buildings.

Constructed with a lamp holder that rotates to adjust to a variety of base angles found in the market and is engineered for years of maintenance free horizontal stick applications.

ORDERING

VIRIBRIGHT LIGHTING INC.

West Coast Office
 391 N Main Street (Suite 201)
 Corona, CA 92879
 Phone: (877) 847.4276
 Fax: (951) 279-4202
 SalesWest@viribright.us

East Coast Office
 22 Cragwood Rd, 22B
 Avenel, NJ 00701
 Phone: (732) 362.2985
 Fax: (732) 362.2994
 SalesEast@Viribright.us

VIRIBRIGHT


www.viribright.us/warranty 3 Years

WWW.VIRIBRIGHT.US



L-PL 8.5W GX23

Benchmark II - LED PL Lamp

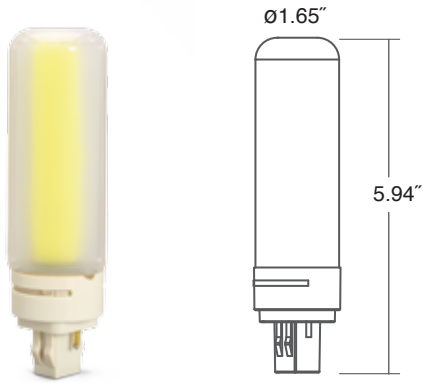

PERFORMANCE OVERVIEW

Product Part #	74230	74231	74232
Bulb Type	PL	PL	PL
Base Type	GX23-2	GX23-2	GX23-2
Correlated Color Temp (CCT)	2700	4000	6000
Lumens (Lm)	600	600	600
CRI	> 80	> 80	> 80
Efficacy	70.6	70.6	70.6
Beam Angle	90°	90°	90°

ELECTRICAL CHARACTERISTICS

Wattage	8.5W
Voltage	100-285V AC
Power Factor	> 0.9
Dimming	Non-Dimmable
Operating Temperature	-20° to 45°

MECHANICAL SPECIFICATIONS

Height (")	5.94
Weight (lb)	0.30
Diameter (")	1.65

FEATURES AND BENEFITS

- 600 Lumens
- Ballast Compatible* or Direct Wire
- Consumes Up to 40% Less Energy
- Extra Long Light (25,000 Hours)
- Cool to Touch
- Contains No Mercury
- Up to 5 Times the Life of PL(C)
- Shatterproof Design
- Contains ViriTrue™ White Technology

COMPATIBILITY

*Magnetic Transformers	Ok
Direct AC	Ok
Electronic Transformers	NO
Ingress Back Up Power	Ok*

Not for use with electronic transformers and can void the warranty.

LOGISTICS

SKU	UPC
74230	818549016037
74231	818549016044
74232	818549016051
Retail Pack	6
Contractor Pack	36
Contractor Pack Dimensions	18.125" x 8.250" x 8.125"
Weight (lb) X.X Cube (cft)	14.04 lbs / 0.7031 cft
Retail Pack Dimensions	TBD
Weight (lb) X.X Cube (cft)	TBD

STANDARDS AND QUALIFICATIONS

- ROHS Compliant
- cETLus Listed



PRODUCT DESCRIPTION

VIRIBRIGHT LED PL Retrofit Lamps are designed to replace plug in (PL) Compact fluorescent lamps (CFLs). VIRIBRIGHT LED PL lamps are ballast compatible with magnetic ballast or direct wire applications and engineered for horizontal applications. Available in 8.5W, with GU24, GX23, G24d, G24Q base options, the VIRIBRIGHT LED PL lamps with our new patent pending remote phosphor technology deliver uniform consistency, and a long 25,000-hour life.

VIRIBRIGHT LED PL lamps replace 13- and 18-watt inefficient PL CFLs, and retrofit a variety of commercial fixtures to include recessed cans, sconces, and ceiling fixtures most commonly found to light retail stores, hotels and apartment buildings.

Constructed with a lamp holder that rotates to adjust to a variety of base angles found in the market and is engineered for years of maintenance free horizontal stick applications.

ORDERING

VIRIBRIGHT LIGHTING INC.

West Coast Office
 391 N Main Street (Suite 201)
 Corona, CA 92879
 Phone: (877) 847.4276
 Fax: (951) 279-4202
 SalesWest@viribright.us

East Coast Office
 22 Cragwood Rd, 22B
 Avenel, NJ 00701
 Phone: (732) 362.2985
 Fax: (732) 362.2994
 SalesEast@Viribright.us

VIRIBRIGHT


www.viribright.us/warranty 3 Years

WWW.VIRIBRIGHT.US



L-PL 8.5W G24Q

Benchmark II - LED PL Lamp

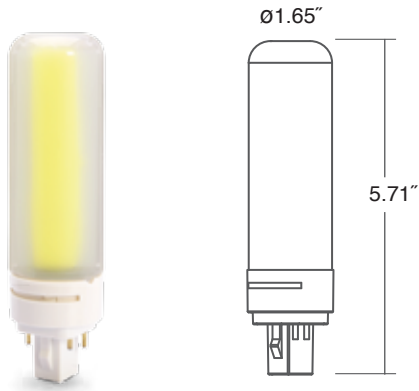

PERFORMANCE OVERVIEW

Product Part #	74491	74492	74493
Bulb Type	PL	PL	PL
Base Type	G24Q	G24Q	G24Q
Correlated Color Temp (CCT)	2700	4000	6000
Lumens (Lm)	600	600	600
CRI	> 80	> 80	> 80
Efficacy	70.6	70.6	70.6
Beam Angle	90°	90°	90°

ELECTRICAL CHARACTERISTICS

Wattage	8.5W
Voltage	100-285V AC
Power Factor	> 0.9
Dimming	Non-Dimmable
Operating Temperature	-20° to 45°

MECHANICAL SPECIFICATIONS

Height (")	5.71
Weight (lb)	0.30
Diameter (")	1.65

FEATURES AND BENEFITS

- 600 Lumens
- Ballast Compatible* or Direct Wire
- Consumes Up to 40% Less Energy
- Extra Long Light (25,000 Hours)
- Cool to Touch
- Contains No Mercury
- Up to 5 Times the Life of PL(C)
- Shatterproof Design
- Contains ViriTrue™ White Technology

COMPATIBILITY

*Magnetic Transformers	Ok
Direct AC	Ok
Electronic Transformers	NO
Ingress Back Up Power	Ok*

Not for use with electric transformers and can void the warranty.

LOGISTICS

SKU	UPC
74491	818549016372
74492	818549016389
74493	818549016396
Retail Pack	6
Contractor Pack	36
Contractor Pack Dimensions	18.125" x 8.250" x 8.125"
Weight (lb) X.X Cube (cft)	14.04 lbs / 0.7031 cft
Retail Pack Dimensions	TBD
Weight (lb) X.X Cube (cft)	TBD

STANDARDS AND QUALIFICATIONS

- ROHS Compliant
- cETLus Listed



PRODUCT DESCRIPTION

VIRIBRIGHT LED PL Retrofit Lamps are designed to replace plug in (PL) Compact fluorescent lamps (CFLs). VIRIBRIGHT LED PL lamps are ballast compatible with magnetic ballast or direct wire applications and engineered for horizontal applications. Available in 8.5W, with GU24, GX23, G24d, G24Q base options, the VIRIBRIGHT LED PL lamps with our new patent pending remote phosphor technology deliver uniform consistency, and a long 25,000-hour life.

VIRIBRIGHT LED PL lamps replace 13- and 18-watt inefficient PL CFLs, and retrofit a variety of commercial fixtures to include recessed cans, sconces, and ceiling fixtures most commonly found to light retail stores, hotels and apartment buildings.

Constructed with a lamp holder that rotates to adjust to a variety of base angles found in the market and is engineered for years of maintenance free horizontal stick applications.

ORDERING

VIRIBRIGHT LIGHTING INC.

West Coast Office
 391 N Main Street (Suite 201)
 Corona, CA 92879
 Phone: (877) 847.4276
 Fax: (951) 279-4202
 SalesWest@viribright.us

East Coast Office
 22 Cragwood Rd, 22B
 Avenel, NJ 00701
 Phone: (732) 362.2985
 Fax: (732) 362.2994
 SalesEast@Viribright.us

VIRIBRIGHT


www.viribright.us/warranty 3 Years

WWW.VIRIBRIGHT.US



L-PL 8.5W GU24

Benchmark II - LED PL Lamp

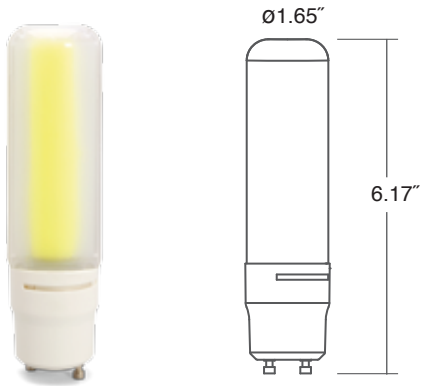

PERFORMANCE OVERVIEW

Product Part #	74233	74234	74235
Bulb Type	PL	PL	PL
Base Type	GU24	GU24	GU24
Correlated Color Temp (CCT)	2700	4000	6000
Lumens (Lm)	600	600	600
CRI	> 80	> 80	> 80
Efficacy	70.6	70.6	70.6
Beam Angle	90°	90°	90°

ELECTRICAL CHARACTERISTICS

Wattage	8.5W
Voltage	100-285V AC
Power Factor	> 0.9
Dimming	Non-Dimmable
Operating Temperature	-20° to 45°

MECHANICAL SPECIFICATIONS

Height (")	6.17
Weight (lb)	0.31
Diameter (")	1.65

FEATURES AND BENEFITS

- 600 Lumens
- Ballast Compatible* or Direct Wire
- Consumes Up to 40% Less Energy
- Extra Long Light (25,000 Hours)
- Cool to Touch
- Contains No Mercury
- Up to 5 Times the Life of PL(C)
- Shatterproof Design
- Contains ViriTrue™ White Technology

COMPATIBILITY

*Magnetic Transformers	Ok
Direct AC	Ok
Electronic Transformers	NO
Ingress Back Up Power	Ok*

Not for use with electronic transformers and can void the warranty.

LOGISTICS

SKU	UPC
74233	818549016068
74234	818549016075
74235	818549016082
Retail Pack	6
Contractor Pack	36
Contractor Pack Dimensions	18.125" x 8.250" x 8.125"
Weight (lb) X.X Cube (cft)	14.04 lbs / 0.7031 cft
Retail Pack Dimensions	TBD
Weight (lb) X.X Cube (cft)	TBD

STANDARDS AND QUALIFICATIONS

- ROHS Compliant
- cETLus Listed



PRODUCT DESCRIPTION

VIRIBRIGHT LED PL Retrofit Lamps are designed to replace plug in (PL) Compact fluorescent lamps (CFLs). VIRIBRIGHT LED PL lamps are ballast compatible with magnetic ballast or direct wire applications and engineered for horizontal applications. Available in 8.5W, with GU24, GX23, G24d, G24Q base options, the VIRIBRIGHT LED PL lamps with our new patent pending remote phosphor technology deliver uniform consistency, and a long 25,000-hour life.

VIRIBRIGHT LED PL lamps replace 13- and 18-watt inefficient PL CFLs, and retrofit a variety of commercial fixtures to include recessed cans, sconces, and ceiling fixtures most commonly found to light retail stores, hotels and apartment buildings.

Constructed with a lamp holder that rotates to adjust to a variety of base angles found in the market and is engineered for years of maintenance free horizontal stick applications.

ORDERING

VIRIBRIGHT LIGHTING INC.

West Coast Office
 391 N Main Street (Suite 201)
 Corona, CA 92879
 Phone: (877) 847.4276
 Fax: (951) 279-4202
 SalesWest@viribright.us

East Coast Office
 22 Cragwood Rd, 22B
 Avenel, NJ 00701
 Phone: (732) 362.2985
 Fax: (732) 362.2994
 SalesEast@Viribright.us

VIRIBRIGHT

www.viribright.us/warranty 3 Years

WWW.VIRIBRIGHT.US

